

STANDARD CABINET

For SensorTran DTS systems



Optional Floor-
Standing Cabinet

In addition to offering bespoke cabinets to meet exacting client's specifications, SensorTran's offers a standard floor-standing DTS Cabinet to complement its range of DTS products.



Typical Cabinet
(with optional extras)

Basic Cabinet Design	
Cabinet Type	Rittal TS8 Floor-Standing Server Cabinet
Typical Dimensions	42U, 19" rack (2200H x 800 W x 800D mm)
Color	RAL 7035 with black plinths
Protection Rating	IP54 (without ventilation fans or air-conditioning unit)
Main Panels	Glazed front viewing door with solid rear door and solid side
Blanking Panels	Included
Plinths	Included (leveling feet not included)

Included Accessories:

- ◇ Ground Busbar (450mm)
- ◇ Cable Entry: Brush-style 100mm wide gland-plate mounted in base panel
- ◇ 19" TFT rack-mount LCD display (40C rated)
- ◇ Pullout keyboard with pointing device
- ◇ 15 Amp Surge Suppressor with fourteen (14) AC power outlets
- ◇ Fiber management (splice) tray
- ◇ Breaker Box: Rack Power Disconnect Assembly, 2 Pole ABB, 20 Amp, UL489 DIN Rail Mount

ASTRA



CENTUARUS



GEMINI



NEPTUNE



ACCESSORY



ASTRA



CENTUARUS



GEMINI




NEPTUNE



ACCESSORY



Typical Cabinet Layout

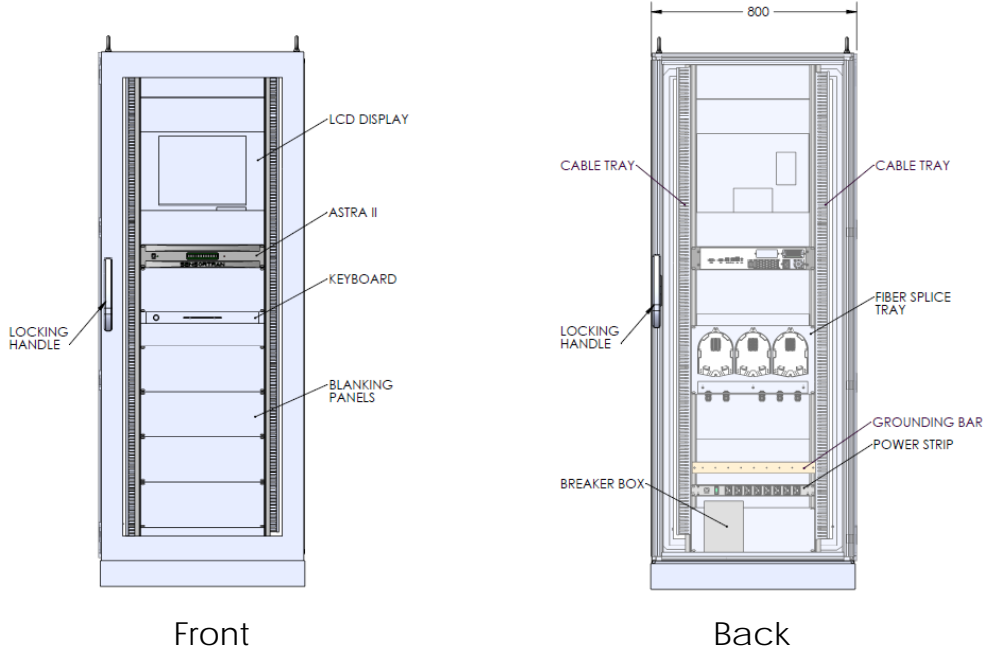

Available Options (not included within Standard DTS Cabinet)

- ◇ DTS Calibration Module
- ◇ Air Conditioning Unit and Ventilation Fans
- ◇ Rack-mounted Relay Panels
- ◇ Uninterrupted Power Supply
- ◇ Lifting Lugs
- ◇ Internal Light (with or without door-operated switch)
- ◇ Leveling Feet (instead of plinths)



SENSORTRAN

Optical Conclusions

Contact

Headquarters	4401 Freidrich Lane, Bldg. 307 Austin, TX 78744 USA	+1-512-583-3520 +1-866-333-2861 (toll-free USA)
Oil, Gas, & Geothermal Sales	262 N. Sam Houston, Suite 410 Houston, TX 77060 USA	+1-281-445-9119
Power, Pipeline, & Process Sales	4401 Freidrich Lane, Bldg. 307 Austin, TX 78744 USA	+1-512-583-3547

www.sensortran.com

sales @ sensortran.com